

Insertion Paddle Wheel type Flow rate Indicator, Totalizer & Transmitter Series-383


NK Instruments Pvt. Ltd. has Insertion Paddle Wheel type Flow Rate Indicator cum Totalizer with Transmitter. This type of meter has a major advantage like – Reasonable price, Very Low Pressure Drop, Easy for handling / Transportation & Installation, Quick delivery.

APPLICATIONS

- Water Treatment
- Filtration Systems
- Chemical / Pharmaceutical
- Bottling / Distillery
- Concrete Batching plant
- Textile / Process machine automation

- A) Flow Sensor,
- B) T-fitting for Flow Sensor &
- C) Digital Unit

Flow Sensor are available in PP or, SS 316 construction. has open collector signal output (sink) and has a wide velocity range of 0.5 to 5 m/s (0.3 to 20 ft/s). The sensor use to measures liquid flow rates in full pipe. Sensors can be installed in 15 NB to 500 NB (0.5 to 20 inches) Line size and even bigger by using the Hot Tab Assembly

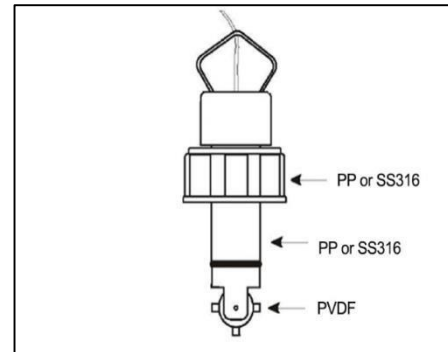

To install these sensors in process lines, specifically designed T-fittings are offered. These fittings are available in various type of T-fittings like Threaded End, Flanged End, and Weld on Adapter, Block design without pipe and Hot Tab Assembly etc. The Sensor mounting fitting is essential for proper installation and better performance of the Flow Sensor.

The Flow Sensor for pipe line size bigger than 150 mm, we suggest to use Hot Tab Assembly for its safe installation and maintenance.

These Digital Flow Transmitters are available in Panel mounted version (model P383) and Field mounted version (model F383). The standard output from Transmitter is 4 to 20 mA, but we can also provide 2 to 10 VDC, RS232 or, RS485. Programmable scale factor with direct flow rate reading in M3/hr / LPH / LPM / LPS / GPMus / GPMuk, and totalizer reading in m3 / Liters / Gallon is available in these series of Flow Transmitters. This model has optional Relay output which can be provided to operate on Totalizer (used for Batching and Dosing application) or, on rate of flow (used as flow switch).



PP Sensor Rod



SS Sensor Rod



**Flameproof
Flow Sensor**



TECHNICAL SPECIFICATIONS FOR P812

Velocity Range	: 0.5 to 5 m/s (1.6 to 16.4 ft./s)
Max. % of Solids	: 1% of fluid volume, non-abrasive, non-magnetic, <100 micron in dia.& length.
Pipe Size Range	: 15 NB to 500 NB (0.5 to 20 inches), for bigger sizes with Hot Tap assembly
Linearity	: $\pm 1\%$ of full range
Repeatability	: $\pm 0.5\%$ of full range
length Min. Reynolds Number	: 4500
Sensor Body	: Polypropylene (black) or PVDF (black) SS 304 / SS 316
O-rings	: Viton / Teflon
Rotor Pin	: Hastelloy C

TYPE OF SENSOR INSTALLATION FITTINGS




LINE SIZE SELECTION

Size	15 NB	25 NB	40 NB	50 NB	65 NB	80 NB	100 NB
Min Flow m ³ /hr	0.23	0.88	2.04	3.50	6.30	8.00	14.0
Max Flow m ³ /hr	2.60	8.80	20.4	35.0	63.0	80.0	140


DIMENSIONAL DETAILS OF FLOW SENSORS & FITTINGS

TYPE OF FLOW SENSORS

PP FLOW SENSOR

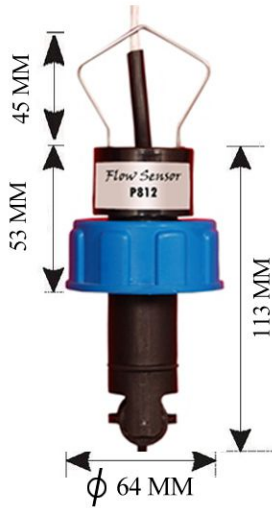

SS FLOW SENSOR

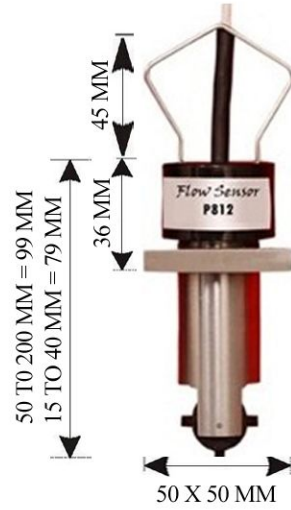

TYPE OF FITTINGS

PLASTIC THREADED END FITTINGS



SIZE	L	H
15 NB	250 MM	88 MM
25 NB	165 MM	100 MM
40 NB	210 MM	115 MM

PLASTIC SOLVENTABLE FITTING

Plastic (ABS) flow sensor installation T fittings with solventable end is available for Line size 1/2" (15 NB), 1" (25 NB) & 1 1/2" (40 NB).



SIZE	L	H
15 NB	90 MM	88 MM
25 NB	110 MM	100 MM
40 NB	130 MM	115 MM


Plastic (PVC) flow sensor installation T fittings with solventable end is available for Line size 2" (50 NB), 2 1/2" (65 NB).

SIZE	L	H
30 NB	142 MM	142 MM
65 NB	165 MM	165 MM

Note: Tolerance level is 1 MM

TYPE OF FITTINGS

STUB END FLANGE FITTINGS

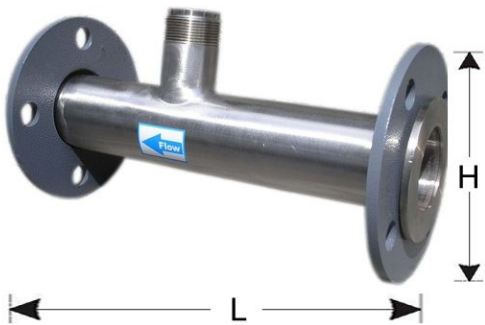


SIZE	L	H
15 NB	270 MM	96 MM
25 NB	270 MM	102 MM
40 NB	250 MM	104 MM
50 NB	300 MM	115 MM
65 NB	350 MM	129 MM
80 NB	450 MM	143 MM
100 NB	500 MM	164 MM

WELDED FLANGE END FITTINGS




SIZE	L	H
15 NB	270 MM	96 MM
25 NB	270 MM	102 MM
40 NB	250 MM	104 MM
50 NB	300 MM	115 MM
65 NB	350 MM	129 MM
80 NB	450 MM	143 MM
100 NB	500 MM	164 MM

STAINLESS STEEL THREADED END FITTINGS

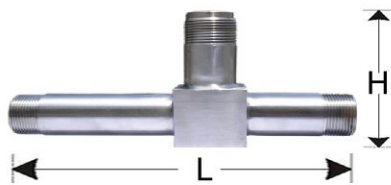

SIZE	L	H
15 NB	270 MM	96 MM
25 NB	275 MM	102 MM
40 NB	250 MM	104 MM

STAINLESS STEEL BLOCK DESIGN FITTINGS




SIZE	L	H
15 NB	55 MM	96 MM
25 NB	55 MM	102 MM

Note: Tolerance level is 1 MM

Fitting Installation Condition

All type of flow meter requires straight run, as per site condition following straight pipe lengths must be provided for best result.

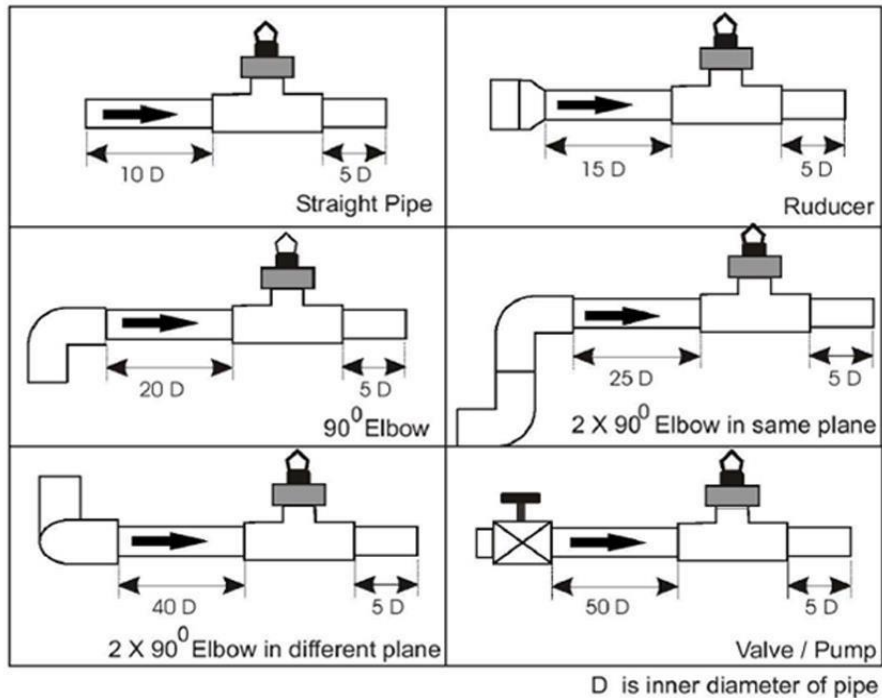

Continuous efforts for product development may necessitate changes in these details without notice

Authorised Dealer



NK Instruments Pvt. Ltd.

B-501/504, 5th floor, Raunak Arcade, Near THC Hospital, Gokhale Road, Naupada,
Thane(W) 400602. Maharashtra INDIA Telefax Nos.: 91-22-25301330 / 31 / 32
E-Mail: sales@nkinstruments.com Web: <http://www.nkinstruments.com>
Skype: nitinkelarskype Gtalk: nkinstruments2006

