




Fusion of Technology

MARUTI ELASTOMERIC SHUTTERING RUBBER SHEET

TECHNICAL SPECIFICATIONS:

S.No	PROPERTIES	VALUE
1.	Hardness	50 ± 5 (Shore-A)
2.	Tensile Strength	1000 (PSI, min.)
3.	elongation at break	300 (% , min.)
4.	Tear Resistance	150 (PSI, min.)
5.	Service Temperature Range	-40°C to + 150°C
6.	Ageing Properties	Excellent
7.	Ozone Resistance	Excellent
8.	Compression Set	40 (% , max.)

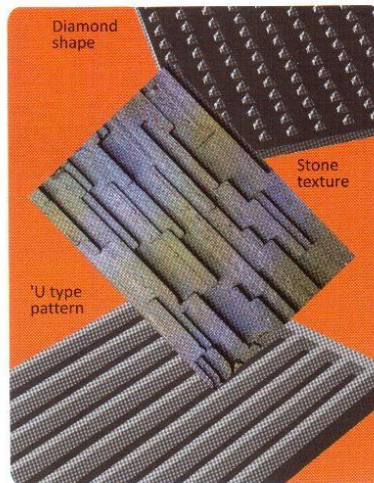

INSTALLATION STEPS



Surface Grinding




Adhesive application and fixing



Fabrication and Drilling



Fabricated complete body



Cross-section of Pillar




Fusion of Technology


MARUTI ELASTOMERIC SHUTTERING RUBBER SHEET

TECHNICAL SPECIFICATIONS:

S.No	PROPERTIES	VALUE
1.	Hardness	50 ± 5 (Shore-A)
2.	Tensile Strength	1000 (PSI, min.)
3.	elongation at break	300 (% , min.)
4.	Tear Resistance	150 (PSI, min.)
5.	Service Temperature Range	-40°C to + 150°C
6.	Ageing Properties	Excellent
7.	Ozone Resistance	Excellent
8.	Compression Set	40 (% , max.)

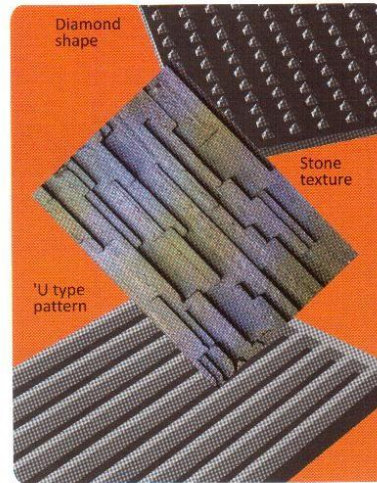

INSTALLATION STEPS




Surface Grinding




Adhesive application and fixing



Fabrication and Drilling



Fabricated complete body



Cross-section of Pillar