



Since 1907

JCPD 15 R

(AC Drive)
Electric Stand-on Counter Balance Stacker
 (Capacity 1500 Kg.)

- MOSFET Programmable Step-less Speed Controller
- Fully-integrated AC Traction System
- Panorama Mast for excellent Visibility of load during Operation
- Industry leading Performance
- Ergonomically designed for enhanced Productivity, Safety & Serviceability

The Jost's Electric Stand-on Counter Balance Stacker, type JCPD has been designed specially for the flexible handling of palletised loads in dual mode either as Pedestrian or stand-on Counter Balance stacker. Through its widened arms and forks which can be lowered almost to the ground, it can be used to pick up unit loads on closed pallets. Jost's Counter Balance Stackers with AC technology provides additional advantage of reduced maintenance, improved power utilisation and improved battery life.



OPERATOR AREA:

The stand-on foldable platform provides excellent comfort and safety. The dampening spring mechanism provides the required cushioning effect that "swallows" the bumps on the surface. The rubberized anti-skid mat provides good grip on stand-on mode enhancing the safety. Emergency stop button provides maximum safety for the operator.



DRIVE & DRIVE CONTROL

Powerful 1.5 Kw high performance AC motor of 1 hour rating, efficiently drives a low noise, two stage compact gear unit mounted directly on to the drive wheel. The Microprocessor based MOSFET controller provide smooth and step-less control of speed and acceleration. It also helps in obtaining fault diagnostic information quickly and easily.



CHASSIS

Robust steel construction and the stable five point contact design permits high residual capacities and enhances stability during turning. The rounded enclosed contours with integrated support straddle permits safe maneuvering during operation. The battery holding compartment in the chassis is provided with suitable roller bed for easy removal of the battery.



WHEELS

The polyurethane wheels configuration enable noiseless smooth ride over variety of surfaces. The tandem load wheel configuration ensures smooth roll over with continuous contact on the floor and enables easy negotiation over small bumps and jerks.



TILLER HEAD & STEERING:

Multifunction tiller head with ergonomically arranged operating elements for travel, lift, lowering and horn at finger tips provide highest operator comfort and safety. It also has a belly button that provides additional safety in case of emergencies. Steering lock at 900 on either side and can be operated only in limited range of handle inclinations comfortable to operator. This provides additional operational safety.



BRAKE

Electromagnetic disc brake with hard wearing, asbestos free liner provides quick braking. When the handle is close to vertical or horizontal position, the brake becomes operational with simultaneous power cut-off.



HYDRAULICS

Compact power pack unit with high pressure pump driven by sturdy Series / compound wound motor forms the heart of hydraulic system which enables smooth and efficient lifting and lowering operations to various stacking heights. During stacking and retrieval, the operator can operate lifting, lowering push button on tiller head without leaving the driving position.



MAST, CARRIAGE & FORKS:

Robust steel fabricated mast, carriage with welded forks ensure durable service. The individual moving components are accurately selected, manufactured and fitted for trouble free performance. The truck is fitted with either a three stage mast with high free lift or two stage mast (PT) as standard for maximum lift height requirement up to 5600 mm. The construction of mast is such that it provides excellent visibility of the load carriage / fork during all operations. Options of fork lengths are available for different type of pallets



SAFETY

The truck is equipped with lowering brake valve for gradual lowering, automatic lift cut off at 80% battery discharge condition for enhanced safety and anti-collision switch on tiller head. The hydraulic circuit has safety feature like hose burst valve, pressure relief valves and non return valves. The controller can also be set for speed as per requirement.



SERVICING

The modular service friendly design with easily removable front cover provides easy access to all components for servicing thus saving valuable time during maintenance.



BATTERY & CHARGER


The equipment comes with 24V / 280Ah traction battery to ensure steady power supply. High frequency constant current automatic charger of Suitable rating traction battery is supplied as a standard.

JCPD 15 R

(AC Drive) Electric Stand-on Straddle Stacker (Capacity 1500 Kg.)


Performance Data

	Model	Nos ^{type}	JCPD15R (EPS)	JCPD15R
Identification	Drive	type	AC	AC
	Operator	type	Stand-on	Stand-on
	Capacity	Q=Kg	1500	1500
	Load center for rated capacity	C=mm	500	500
Weight	Battery weight (apx.)	Kg.	300-360	300-360
	Service weight	Kg	2030	2030
Wheels / Chassis	Wheels	type	Polyurethane	Polyurethane
	Load wheel	mm	Ø200 x 100W	Ø200 x 100W
	Support Castors wheel	mm	-	Ø150 x 60W
	Drive wheel	mm	Ø280 x 100W	Ø280 x 100W
	Wheels, number front / rear (x = driven wheels)	nos.	'1 / 2	'1 / 2
Basic Dimensions	Lower height	h=mm	70	70
	Length to face of forks	L2=mm	1700	1700
	Truck length	L=mm	2660	2660
	Width over forks Max (adjustable)	m=mm	220-680	220-680
	Overall width	B1=mm	990	990
	Adjustable fork dimensions	s/e/l=mm	35 / 100 / 950 (1070)	35 / 100 / 950 (1070)
Performance	Turning radius during maneuvering	Wa=mm	1600	1600
	Fork tilt Forward / Backward		'3 / 6	'3 / 6
	Travel speed, laden	km / h	6.6	6.6
	Travel speed, unladen	km / h	7	7
	Lift speed, laden / unladen	cm / s	'12 / 16	'12 / 16
	Lowering speed, laden / unladen	cm / s	'45	'45
	Service brake	type	Electromagnetic	Electromagnetic

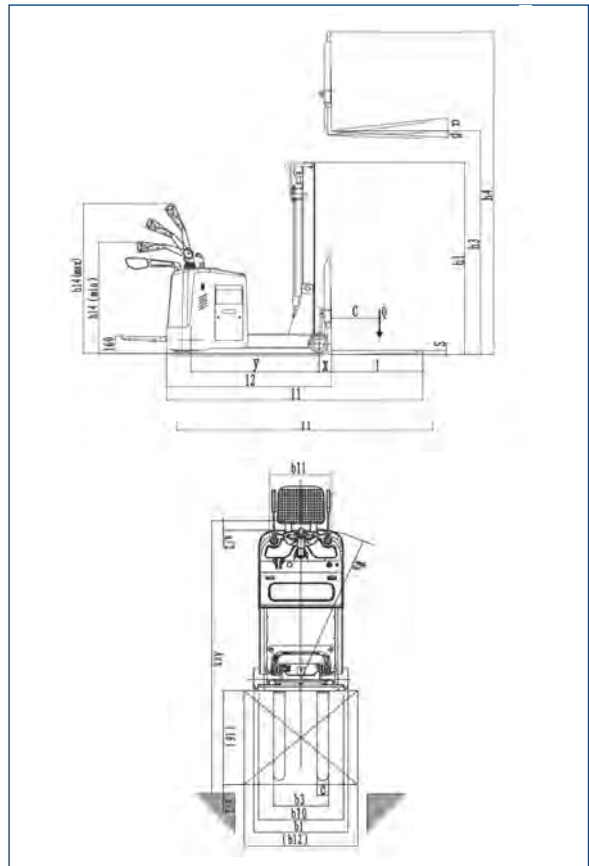

- h1 – Closed mast height
- h3 – Lift
- h4 – Extended mast height
- h – Height of straddle (lower height)
- h5 – High free lift

Load Capacity Chart

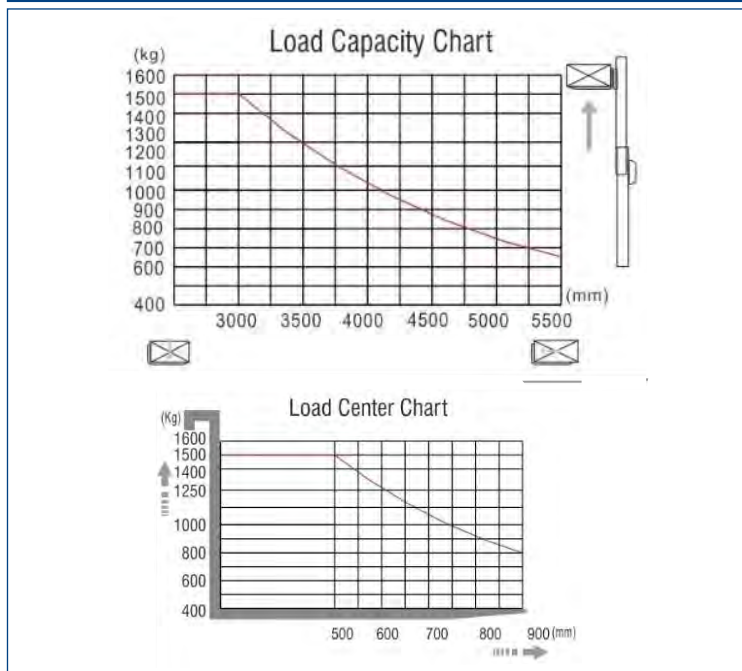

Standard Mast Designs (mm)

2 – Stage Mast		
JCPD 15R		
h1	h3	h4
1735	2500	3500
1985	3000	4000
2235	3500	4500

3 – Stage Mast			
JCPD15R			
h1	h3	h5	h4
1835	4000	1400	5000
2085	4500	1500	5500
2235	5000	1670	6000
2435	5600	1870	6600

Note : Non standard lift height may be available on request.

- h1 – Close mast height
- h2 – Normal free lift
- h3 – Free lift
- h4 – Extended mast height
- h5 – Special free lift
- h – Fork lower height

Working Aisle Width Ast. (mm) Incl. 200 mm Safety Clearance

Pallet size cxb	Position	
800 x 1200	Lengthways	3120

For any special requirements, Please contact Jost's H.O., Dimensions indicated here are subject to variations of ± 20 mm and performance ± 10%. Service weight ± 50 kg. Right to make changes and technical improvement reserved.



Since 1907

Jost's Engineering Company Limited

C-7 Wagle Industrial Estate, Road No. 12, Thane - 400 604. Maharashtra. INDIA.

T.: +91 22 6267 4000 E.: jostfact@josts.in W.: www.josts.com

Bengaluru : +91 80 4123 4775 / 4123 4885 Chennai : +91 44 2626 8536 / 2628 8407 Delhi : +91 11 4160 7989 Kolkata : +91 33 2242 9510 / 4008 1242
Pune : +91 20 2543 4565 / 2543 4390 Secunderabad : +91 40 2771 4934 / 44 / 54 Vadodara : +91 265 2351 642

Dial-a-care: 1800-2745-661

MKT:11:00:084:0821