

## CLASSIC - INTERNAL CALIBRATION

### FEATURES :-

\* Built-in motorized calibration weight ensures the highest accuracy at the press of a key.

\* **Support:** Weighing, Counting, Percentage, Animal Weighing.  
Optional: Density measurement optional

\* 18 standard units, with all-character mark.


\* Strong anti-shaking monolithic electromagnetic for highest accuracy.

\* Standard 1500V isolation USB port, ease to connect with PC.

\* User selectable filter, stability indicator and auto-zero tracking for use in difficult environment.

\* Large, sturdy and nearly frameless, all-glass draft shield chamber for optimal viewing of weighing chamber.

\* Backlit, high-contrast display with 15 mm digits; exceptionally easy to read under any room lighting conditions.

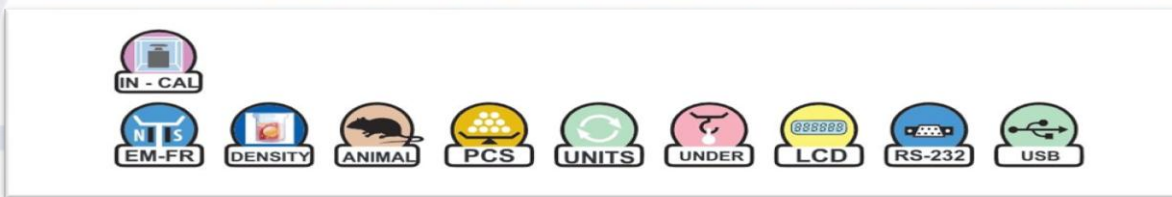

MODEL	CAPACITY [G]	RESOLUTION [G]	PAN [MM]	REPEATABILITY [G]	LINEARITY [G]	RESPONSE TIME [SEC.]
<b>INTERNAL CALIBRATION</b>						
SIM-124 IN CAL	120	0.0001	Ø90	± 0.0001	± 0.0002	<5
SIM-224 IN CAL	220	0.0001	Ø90	± 0.0001	± 0.0002	<5

Optional Accessories at extra cost :Density kit, Printer, software, Test weights.