


## Reliable TuffBeYouty Bubble Finish Texture



### Key Features

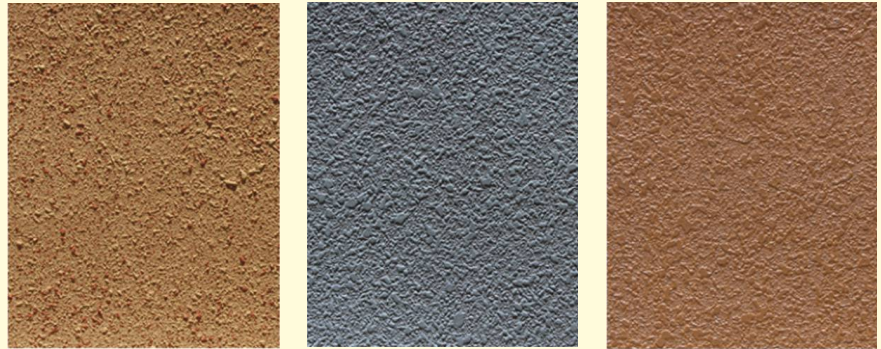

Anti-Algae,  
Anti-Fungal  
protection



Superior  
adhesion on  
normal & moist  
surfaces



Plaster  
Protection




Improved  
durability  
& life



Acid & Alkali  
Resistance



Quick  
Drying



Hides surface  
undulation &  
fine Cracks



### Technical Data

Property	Data
Colour / Finish	Base Colors White / Texture
Recommended DFT	1-2 mm
Solids	78.00 ± 2%
PH	8 to 9
Specific Gravity kh/ltr	1.82±0.05
Theoretical Spreading Rate	5 -6 sq ft per kg per coat
Shelf Life	12 months when stored in cool & dry place in original sealed container
Top Coat	Compatible to all the existing acrylic top coating systems (viz. Distemper, Plastic Paint, etc)
Drying Time @ 30oC	Temperature, humidity, air movement, film thickness and number of coats all affect the drying time.
Touch Dry (hours)	1
Dry to recoat (hours)	16-18
Recommended Method	Reliable Primer : 1 Coat Bubble Finish : 1 Coats Acrylic Emulsion : 2Coat



### Pack Sizes and Shade Range

🔑 Pack Size Availability :- 2 kg, 5 Kg, 10 kg, 20 Kg

🔑 Shade :- White



## Substrate Suitability

Home Coat's Tuff BeYouty Bubble Finish Texture is compatible to the following substrates



Asbestos sheets



Concrete



Plaster



## Surface preparation



Ensure that the surface to be painted is free from any loose paint, dust and grease.



Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.



On fungus affected areas apply a coat of 'Bio Wash' solution. Allow it to dry for 4-6 hours and then wash with water



## Direction for use



For freshly plastered surface, apply 1 coat of Reliable Acrylic Water Primer by diluting 1 ltr of primer with 500 ml of water.



Allow the primer to dry for 3-4 hours before application of texture finish.



Apply a coat of TuffBeyouty Bubble Finish Texture by spray gun as per desired bubble pattern. Add 3~5% water depending on application requirement. In case of pressed bubbled finish, press the bubble gently with a metal trowel 5-10 minutes after spraying.



Allow the Texture Finish to dry for 16-18 hours.



Apply 2 coats of Acrylic emulsion paint as top coat (as recommended).



## Precautions



Prior to use, please use, read and follow product specifications, MSDS and label information.



Do not over thin.



Avoid contact with eye and skin.



Use safety equipment such as rubber gloves and safety goggles.



**HomeCoat OPC Pvt. Ltd.**

📍 **Factory:** A10, Balaji Industrial Estate, Tondre, Talaja MIDC, Panvel 410206

📍 **Reg. Office :** 101, PrabhuKripa, Plt no 10&12, Rd no 13, Sect 19, New Panvel, Raigad 410206

☎ **8260013001** 📧 [connect@homecoat.in](mailto:connect@homecoat.in) 🌐 [www.homecoat.in](http://www.homecoat.in)