


Hemnil Protection

505 , Gopal Puri, S.V.Road ,Borivali (East) , Mumbai - 400066.

E-mail - jainav@gmail.com, rdbros@mtnl.net.in



CARBONSHIELD,

NON-ASBESTOS, 100% ITCHING FREE

NON- ASBESTOS FI RE/ WELDI NG BLANKETS

Application:

Welding blankets provides protection from sparks, spatter, slags generated by welding or metal cutting application, have been widely used in many industries include shipbuilding, construction, automotive parts, oil plants, flammable chemicals, and so on.

Description:

Various treatments and sizes could be fabricated on request. And we can install with eyelets, clips or Velcro on the blankets in order to suit your individual needs.

Guidance of fabrics selection:

The type of welding application determines which type of fabrics are needed.

- Light duty welding blankets (130Z to 180Z) : general purpose welding, light sparks, minimal spatter.
- Medium duty welding blankets (200Z to 300Z) : heavier welding, sparked, spatter, light slag.
- Heavy duty welding blankets (320Z to 500Z): heavy sparks, spatter, slag, possibility of molten metal.

Difference between coated welding blankets and uncoated welding blankets:

- Coated fabrics offer better abrasion and burn through resistance. They are stiffer which allow spatter and slag to roll off more easily.
- Uncoated fabrics are more pliable and are easier to drape over and wrap around objects.

Contact Person Name :

Mr. Dharmendra P. Vora


Mobile No : 09322212320

Web Site : www.hemnilprotection.com

Hemnil Protection

505 , Gopal Puri, S.V.Road ,Borivali (East) , Mumbai - 400066.

E-mail - jainav@gmail.com, rdbros@mtnl.net.in

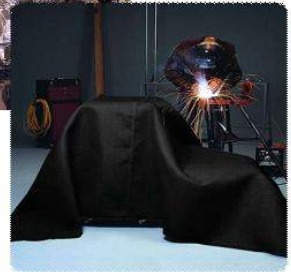

CARBONSHIELD,

NON-ASBESTOS, 100% ITCHING FREE

FI RE/ WELDI NG BLANKET SPECI FI CATI ONS

CODE NO.	ITEM DESCRIPTION	THICKNESS	WEIGHT	COLOUR	TEMPRATURE
TYPE : HP/3732	E-GLASS FIBER PRODUCT	0.43MM	430G/M2	WHITE	550°C
SIZE : 1MTR X 50 MTR/ROLL APPLICATION : WELDING SAFETY					
TYPE : HP/7628	E-GLASS FIBER PRODUCT	0.2 MM	200G/M2	WHITE	550°C
SIZE : 1MTR X 100 MTR/ROLL APPLICATION : WELDING SAFETY					
TYPE : HP/FRP700	FIRE RETARDANT PVC COATED POLYESTER TARPAULIN	0.7MM	600G/M2	ORENGE/GREEN	250°C
SIZE : 6MTR X 6MTR WITH EYELETS 100% WATER PROOF APPLICATION : WELDER TENT/PORTABLE WELDING BOOTH					

Contact Person Name :

Mr. Dharmendra P. Vora


Mobile No : 09322212320

Web Site : www.hemnilprotection.com

Hemnil Protection

505 , Gopal Puri, S.V.Road ,Borivali (East) , Mumbai - 400066.


E-mail - jainav@gmail.com, rdbros@mtnl.net.in



CARBONSHIELD,

NON-ASBESTOS, 100% ITCHING FREE

FI RE/ WELDI NG BLANKET SPECI FI CATI ONS

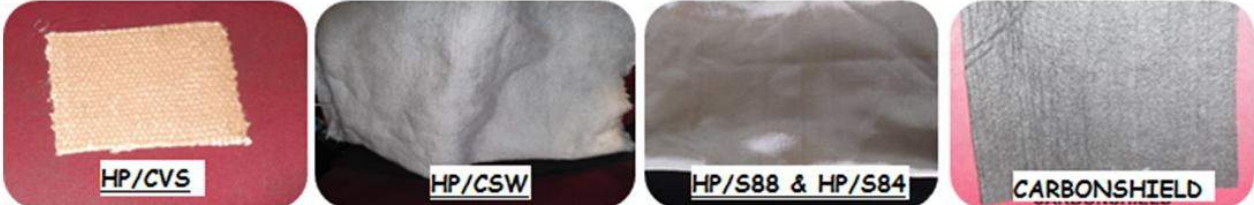CODE NO.	ITEM DESCRIPTION	THICKNESS	WEIGHT	COLOUR	TEMPRATURE
TYPE : HP/CVS	CERAMIC FIBER WITH SS WIRE & VERMICULITE COATING	3.0MM	1500G/M2	BROWN	1260°C
SIZE : 1MTR X 30 MTR/ROLL APPLICATION : FIRE/WELDING BLANKETS/CURTAIN & INSULATION					
TYPE : HP/CSW	CERAMIC FIBER WITH SS WIRE	3.0MM	1400G/M2	WHITE	1100°C
SIZE : 1MTR X 30 MTR/ROLL APPLICATION : FIRE/WELDING BLANKETS/CURTAIN & INSULATION					
TYPE : HP/S88	SILICA FIBER PRODUCT	1.35MM	1200G/M2	GOLD	1100°C
SIZE : 910 MM X 50 MTR/ROLL APPLICATION : WELDING SAFETY WELDING BLANKET/CURTAIN					
TYPE : HP/S84	SILICA FIBER PRODUCT	0.7MM	720G/M2	GOLD	1100°C
SIZE : 910 MM X 50 MTR/ROLL 100% ITCHING FREE APPLICATION : WELDING SAFETY WELDING BLANKET/CURTAIN					
"CARBONSHILED"	"CARBONSHILED" CARBON FIBER	4.0MM	650G/M2	BLACK	1000°C
SIZE : 1MTR X 50 MTR/ROLL 100% ITCHING FREE, LIGHT WIGHT APPLICATION : FIRE/WELDING BLANKETS/CURTAIN & INSULATION					
					

Contact Person Name :

Mr. Dharmendra P. Vora


Mobile No : 09322212320

Web Site : www.hemnilprotection.com

Hemnil Protection

505 , Gopal Puri, S.V.Road , Borivali (East) , Mumbai - 400066.

E-mail - jainav@gmail.com, rdbros@mtnl.net.in



CARBONSHIELD,

NON-ASBESTOS, 100% ITCHING FREE

FI RE/ WELDI NG BLANKET SPECI FI CATI ONS

CODE NO.	ITEM DESCRIPTION	THICKNESS	WEIGHT	COLOUR	TEMPRATURE
TYPE : HP/BLK	E-GLASS FIBER WITH GRAPHITE	1.7MM	1700G/M2	BLACK	850°C
SIZE : 1MTR X 30 MTR/ROLL APPLICATION : WELDING SAFETY WELDING BLANKET/CURTAIN					
TYPE : HP/SI/2G	E-FIBER GLASS WITH SILICON COATING BOTH SIDE	1.1MM	1100G/M2	SILVER/RED	750°C
SIZE : 1MTR X 50 MTR/ROLL 100% WATER PROOF/100% ITCHING FREE APPLICATION : WELDER TENT/PORTABLE WELDING BOOTH/CURTAIN/BLANKET					
TYPE : HP/GLOD	E-GLASS FIBER PRODUCT HEAT TREATED, LESS ITCHING.	0.5MM	500G/M2	GOLD	650°C
SIZE : 1MTR X 50 MTR/ROLL APPLICATION : WELDING SAFETY					
TYPE : HP/FFRP800	FIRE RETARDANT PVC COATED FIBER GLASS TARPULIN	0.8MM	780G/M2	ORENGE/GREEN	FB is 550 °C WHILE PVC is 220 °C
SIZE : 6MTR X 6MTR WITH EYELETS 100% WATER PROOF APPLICATION : WELDER TENT/PORTABLE WELDING BOOTH					
TYPE :HP/3784	E-GLASS FIBER PRODUCT	0.8MM	800G/M2	WHITE	550°C
SIZE : 1MTR X 50 MTR/ROLL APPLICATION : WELDING SAFETY					

Contact Person Name :

Mr. Dharmendra P. Vora

Mobile No : 09322212320

Web Site : www.hemnilprotection.com