



NICXs-200

**"New Generation
of Panel Meters"**



DESCRIPTION

NICXs-200 Series

The NICXs -200 series are Class I.0 multifunction power and energy meters manufactured by Siliconicxs. They are the ideal choice for the monitoring and controlling of power distribution systems. Some of the Default features and electrical power parameters available on the NICXs Series. All monitored data are available via a digital Rs485 communication port running Modbus RTU protocol.

With its flexible, modular I/O and communication options. The NICXs-200series is the most versatile and cost-effective metering solution on the market.

- True-RMS Measuring Parameter IEC 62053-21-22(Class 1)
- Accurate under all Load Conditions
- Universal Power Supply
- 54 Electrical Parameter based on NICXs-200 Series Model Selection
- Run Hours Counts based on Set Points Limits Value (V/I/kW/kVA)
- Over/Under Visual Alarm On the meters
- Communication Ports (RS485)

Optional Add On Models

- Communication - Rs485
- Demand Controller (Tripping Control 1 Relay)
- Max 2 Digital / Pulse Outputs
- Max 3 Digital Inputs

Applications

- Metering of distribution feeders, transformers, generators.
- Capacitor banks and motors
- Medium and low voltage systems
- Commercial, industrial, utility
- Automation Control and PLC Applications
- Energy management System
- Ac and Compressor Load

Specifications

METERING

Parameters	Accuracy		Resolution	Range
	Class 1.0	Class 0.5		
Voltage	0.2 %	0.2%	0.1V	20 V - 999.9 MVA
Current	0.5%	0.2%	0.1 mA	10 mA - 9999 A
Power	1%	0.5%	1w	0-99.99MW
Reactive Power	1%	0.5%	1Var	0-99.99MVar
Apparent Power	1%	0.5%	1VA	0-99.99MVA
Power Factor	1%	0.5%	0.001	Lag-Unity-Lead
Power Demand	1%	0.5%	1w	0-99.99MW
Apparent Power Demand	1%	0.5%	1VA	0-99.99MVA
Energy	1%	0.5%	0.1kWh	0-9999999.9kWh
Reactive Energy	2%	2%	0.1 kVArh	0-9999999.9kVAh
Apparent Energy	1%	0.5%	0.1 kVArh	0-9999999.9kVArh
Frequency	0.2%	0.1%	0.01 Hz	45.00- 65.00 Hz
Running Time			0.01 h	0-9999H:99M:99s

Inputs

Voltage Inputs(Each Channel)

System	Three Phase 3 wire or 4 wire
	Unbalanced
Nominal Full Scale	400Vac L-N, 690Vac L-L(+20%)
Isolation	2500Vac,50/60hz for 1 minute
Input Impedance	2Mohm per phase
Metering Frequency	45Hz - 65Hz
Pickup Voltage	20Vac

Current Inputs(Each Channel)

Nominal Current	5A/1A
Metering Range	10mA - 10A ac
Withstand	20Arms continuous,100Arms for 1 second, non-recurring
Burden	0.05VA(typical)@5Arms
Pickup Current	10 mA

OPERATING ENVIRONMENT

Operation Temperature - 25°C to 70 °C
 Storage Temperature - 40°C to 85 °C
 Relative Humidity 5% to 95% non-condensing

COMMUNICATION

RS-485(Standard)
 MODBUS RTU Protocol,2-Wire Connection
 9600-38400 baud rate

Power Supply

Universal	AC or DC
AC/DC AUXILIARY POWER	
Operating Range	85-265 Vac,50/60Hz; 100-370Vdc
Burden	5W
No Load Input Power	<400mW
Frequency	47-440 Hz
Isolation	4000Vac,45/65Hz for 1 minute
Installation Category	III(Distribution)

I/O OPTION

Digital Output(DO)	Relay Output
Voltage Range	0-400 Vac/dc
Load Current	100mA(Max)
Output Ton+Toff	10ms ON, 10ms OFF
Isolation Voltage	5000Vac
Switching Voltage (Max)	250Vac, 30Vdc
Load Current	5A® 2A(L)
Set Time	10ms (Max)
Contact Resistance	30mΩ (Max)
Isolation Voltage	2500Vac

Pulse Output

Function 1 pulse per unit of energy
 Scaling Configurable
 Pulse duration 0.1 second default (other durations configurable)
 Type N/O volt free contact. Optically isolated.
 Isolation 5000Vac 45-60Hz 1 minute

Standard Complience

Measurement Standard IEC 62053-21, 22
 Environmental Standard IEC 60068-2
 Safety Standard IEC 61010-1, UL 61010-1
 EMC Standard IEC 61000-4/-2-3-4-5-6-8-11

● Function

Default

○ Option

Blank-NA

Category	Description	Parameters	NICXs-200	NICXs-210	NICXs220	NICXs-230
Metering	Real Time Metering	Phase Voltage Line Voltage Frequency Line Current Power Apparent Power Reactive Power Power Factor	V1, V2, V3,Vlnavg V12, V23, V31, Vllavg F I1, I2, I3, In, Iavg P1,P2,P3,Psum S1,S2,S3,Ssum Q1,Q2,Q3,Qsum PF1,PF2,PF3,PF	● ● ● ● ● ● ● ●	● ● ● ● ● ● ● ●	● ● ● ● ● ● ● ●
	Energy	Energy Reactive Energy Apparent Energy	Import,Export Import,Export (Lag/Lead) Es	Import ●	Import ●	● ●
	Demand	Demand	DMD-kVA , DMD-kW			●
	Default Features	Run Hours	V/l/kW/kVA			
		Operating Hours	Aux Power Supply is on >0 V			
		Power Interruption	Aux Power Supply is Off <0 V			
		Events (Min/Max)	Real time Parameters			
Option Module	Alarm	Over/Under Limit Alarm/ Trip	V, I, P, Q, S, PF, DMD_kVA & DMD_kW each phase and total or average	○	○	○
	Pulse Output/ Digital Output	Do	kWh, kvarh or kWhAh	○	○	○
	IF Digital Output	Over/Under Limit	V, I, P, Q, S, PF, DMD_kVA & DMD_kW each phase and total or average	○	○	○
	Digital Inputs	Wet Contact	Pulse and Status Combined Counter	○	○	○
	Communication	RS485 Module	Additional MODBUS RTU	○	○	○

Salient Features

- High accuracy - class 1/ option 0.5 as per IEC 62053-21,22
- Up to 4 parameter simultaneous readings on bright red LED display
- Universal meter-
- Selectable wiring configurations including 3-wire Delta and 4-wire Star
- CT secondary setting of 1A or 5A
- Complete PT and CT ratio programming on site.
- Programmable Demand interval and type of demand calculation (Factory Set)
- Communication Baud rate selectable between 1200 to 19200
- RS-485 port with Modbus RTU Protocol – for easy integration with DCS/ SCADA
- Universal power supply – accepts 83-265V AC or 110-300V DC on the same
- Terminals
- Easy installation – Factory Standards
- Automatic/Manual scroll and data refresh period is user selectable
- Password facility
- Compact - fits 92 x 92mm cut-outs.
- Protection rating of IP-53
- Future upgradable Customized options
- Ideal for Energy Management Networks

Display


Display 4 Row 4 Digits
7 Segments Display

Digit Height 0.44"


Display 4 Row 4 Digits
7 Segments Display

Typical Wiring Configuration

3Phase 4Wire Configuration (Star)

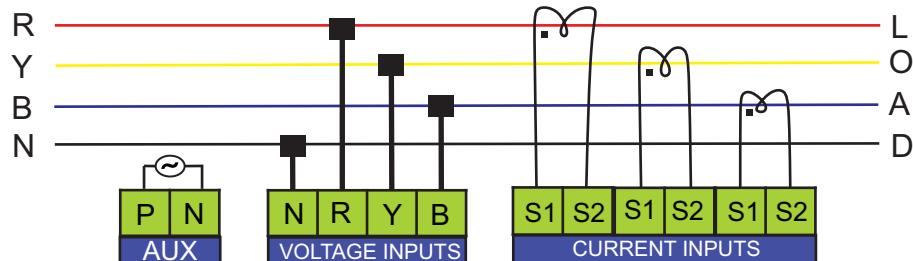


3Phase 3Wire Configuration (Delta)

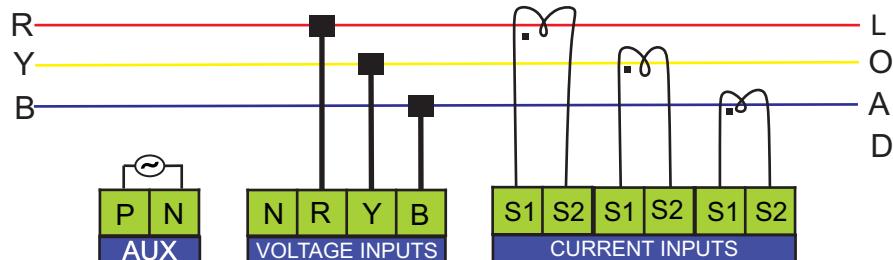

CableSize(AWG):20 to 14 ; Tightening Torque(Lb-inch):6.018 to 6.992

Cable Size(mm²):0.5 to 2.5 ;Tightening Torque(N-m):0.68 to 0.79

Dimensions

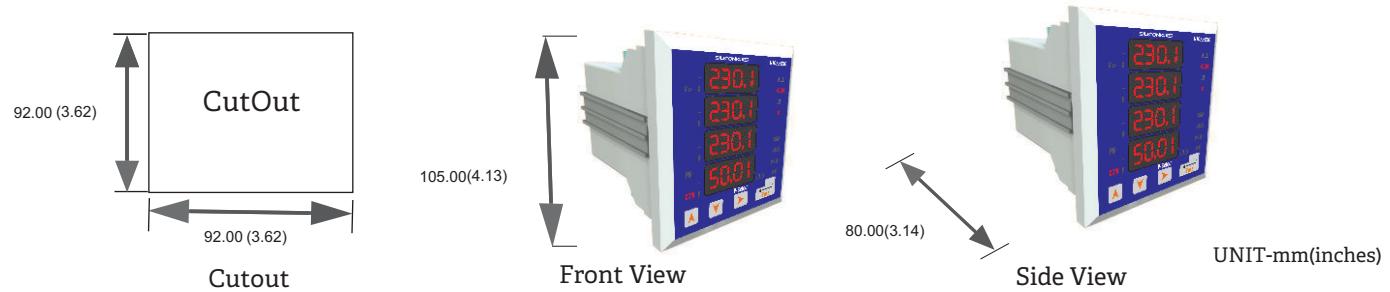

Example Application

