

D20-40/20-400-PP

## 30.000 - 50.000 l/h

### Typical applications

- Plating
- Rinsing
- Filtration
- Waste treatment
- Scrubbing


### Features

- Available in PP or NPP
- Immersion length 400mm
- Environmentally safe in-tank installation
- Free turning shaft - no seal
- Self priming - can run dry
- Full length motor shaft
- Outlet sockets available in PP, PVDF and CPVC

### Options

- Suction extension pipe
- Out-of-Tank model
- Vapour lock
- Strainer

## Vertical pumps series D20

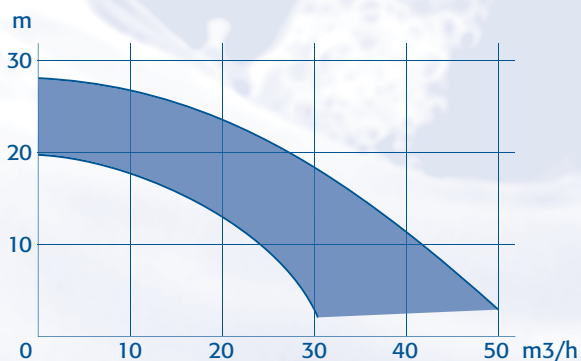


### Type

D20-40/20-400-PP  
D20-45/25-400-PP  
D20-50/28-400-PP

### Out (d/DN)

50/40

 [www.hendor.com](http://www.hendor.com)

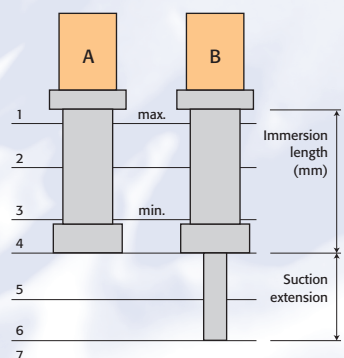

- 1 D20-40/20-400-PP
- 2 D20-45/25-400-PP
- 3 D20-50/28-400-PP

