



D24-65/37-400-PP

40.000 - 100.000 l/h

Typical applications

- Plating
- Rinsing
- Filtration
- Waste treatment
- Scrubbing


Features

- Available in PP or NPP
- Immersion length 400mm
- Environmentally safe in-tank installation
- Free turning shaft - no seal
- Self priming - can run dry
- Full length motor shaft
- Outlet sockets available in PP, PVDF and CPVC

Options


- Suction extension pipe
- Out-of-Tank model
- Vapour lock
- Strainer

Vertical pumps series D24


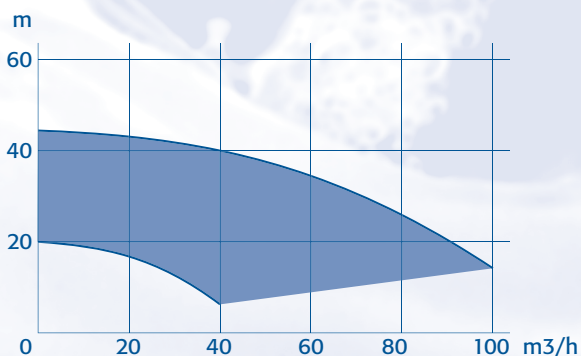


| Type | Out (d/DN) |
|-------------------|------------|
| D24-50/27-400-PP | |
| D24-55/35-400-PP | 63/50 |
| D24-60/42-400-PP | |
| D24-60/29-400-PP | |
| D24-65/37-400-PP | 75/65 |
| D24-70/42-400-PP | |
| D24-80/34-400-PP | |
| D24-90/38-400-PP | 75/65 |
| D24-100/42-400-PP | |



 www.hendor.com

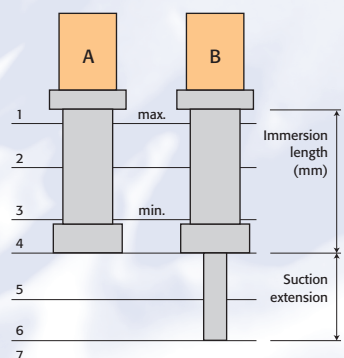

- 1 D24-50/27-400-PP
- 2 D24-55/35-400-PP
- 3 D24-60/42-400-PP

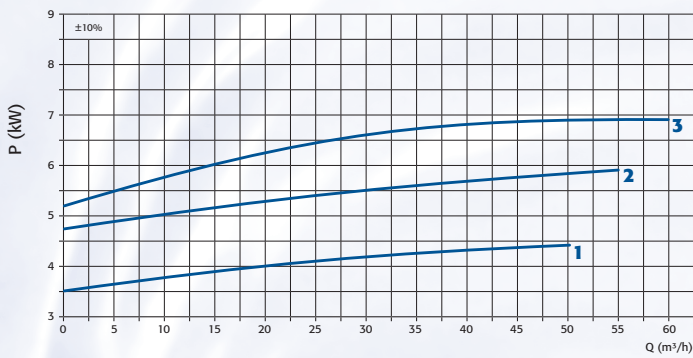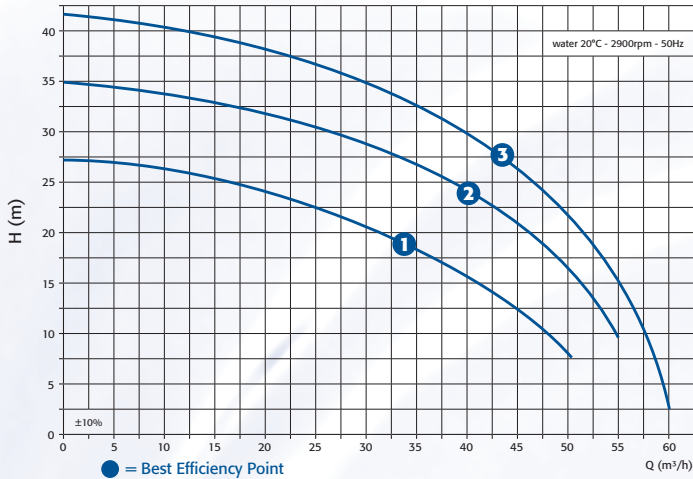

- 4 D24-60/29-400-PP
- 5 D24-65/37-400-PP
- 6 D24-70/42-400-PP

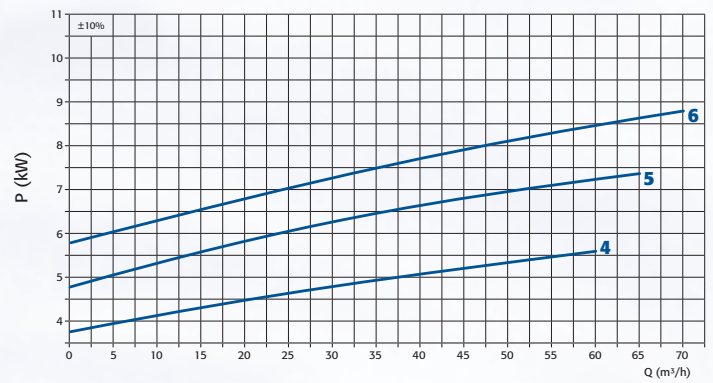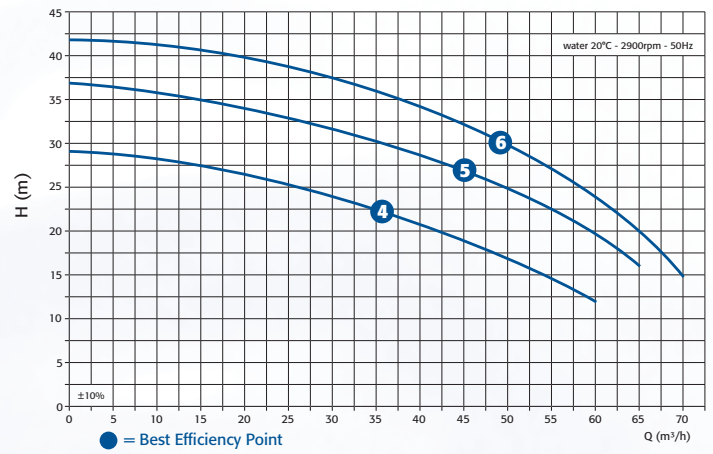

- 7 D24-80/34-400-PP
- 8 D24-90/38-400-PP
- 9 D24-100/42-400-PP

