

600x600mm / 800x800mm

DOUBLE CHARGED

VITRIFIED TILES

EDITION : 2018

Holy

Dedicated to luxurious life

Holy

Dedicated to luxurious life

LG - SERIES




800x800
millimeters



LG - CREAMA

8001

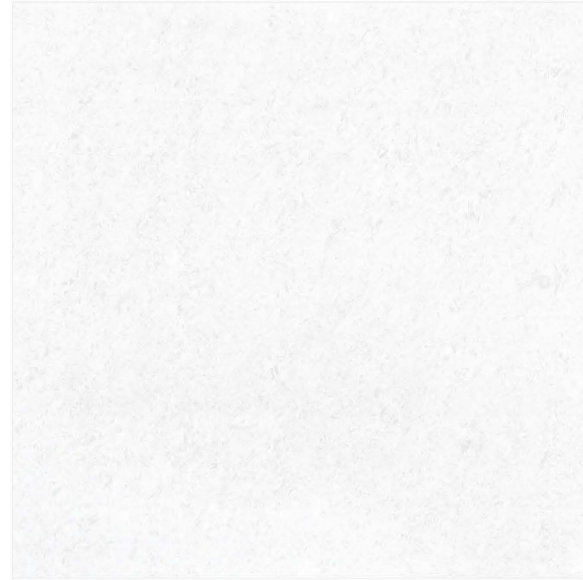

LG - WHITE

8002



LG - ASH

8107



LG - JAZZ

8108



Double Charged
VITRIFIED TILES



ANTI FREEZE



DEEP ABRASION
RESISTANCE



CHEMICAL
RESISTANCE



BREAKING
STRENGTH



WATER
ABSORPTION


Holy

Dedicated to luxurious life

LEMO SERIES




600x600
millimeters

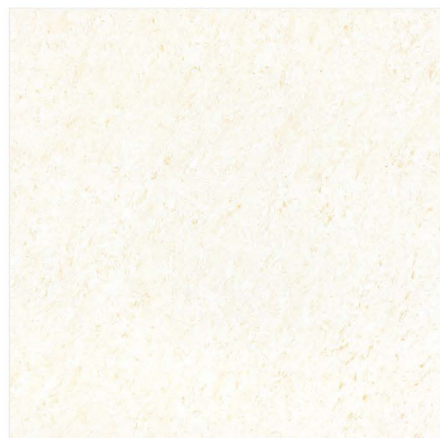


LEMO CREAMA

1001

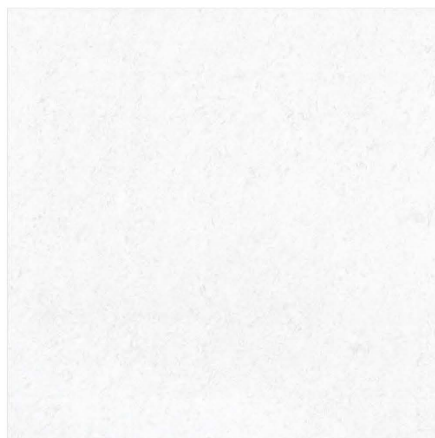


LEMO WHITE

1002

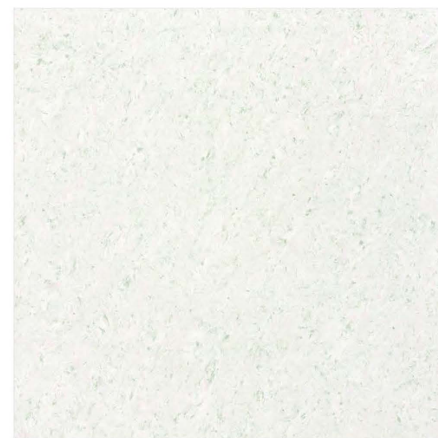


LEMO PEARL

1004

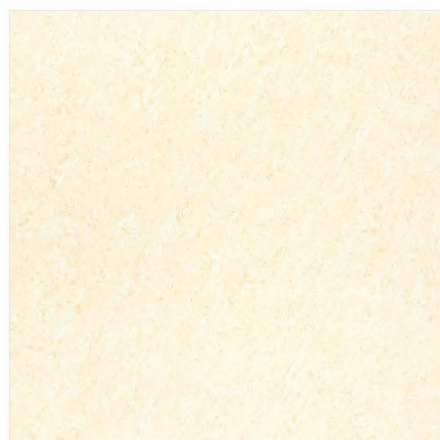


LEMO GOLD

1005

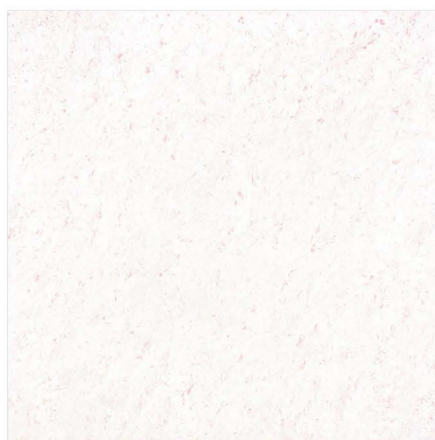


LEMO CORAL

1006

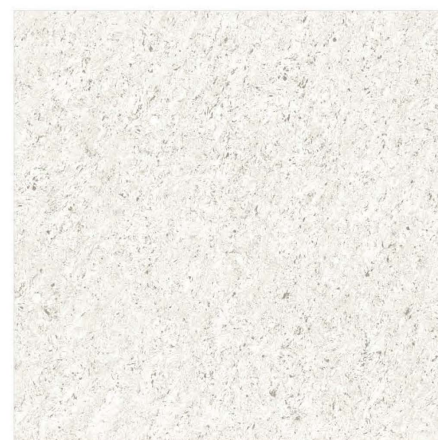

LEMO BEIGE

1007

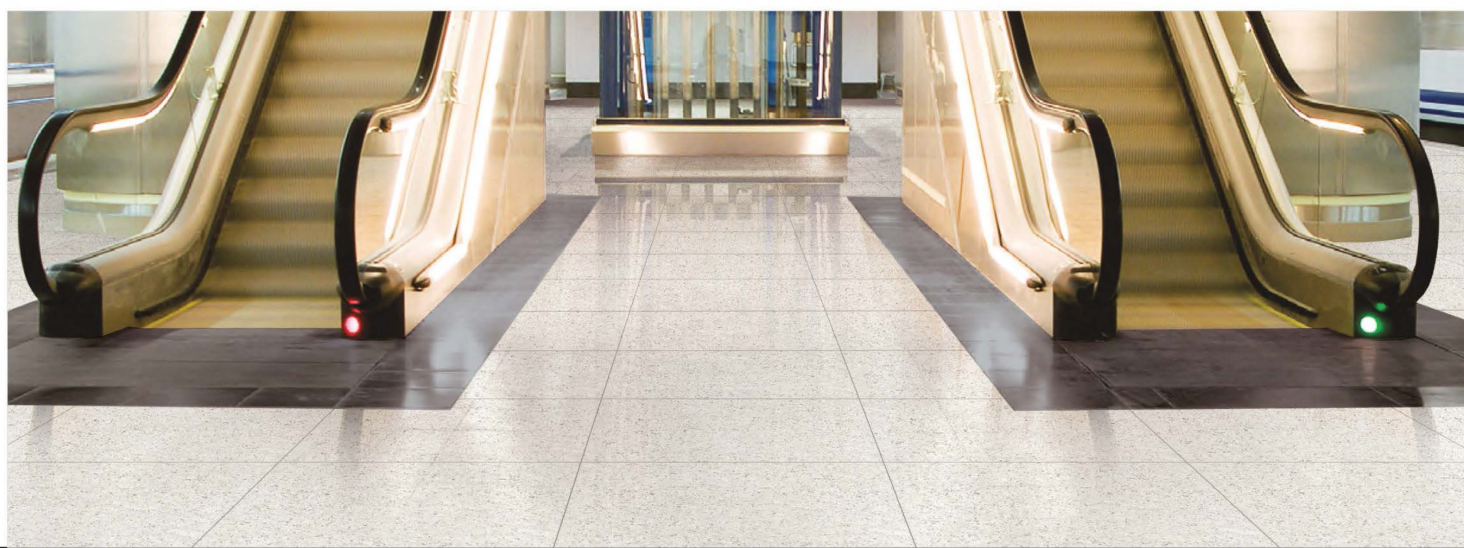

Holy

Dedicated to luxurious life

LEMO SERIES



600x600
millimeters



LEMO GREEN

1101



LEMO COPPER

1102




LEMO CHOCO

1103



LEMO BLUE

1104

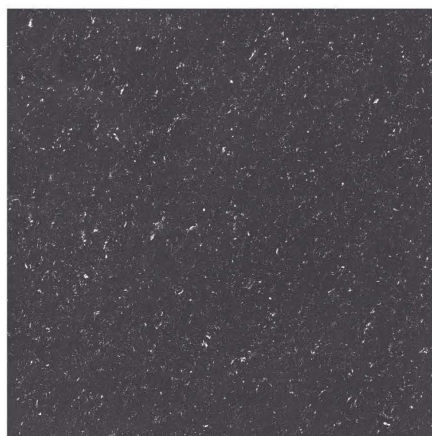

LEMO BLACK

1105



LEMO ALMOND

1106




LEMO ASH

1107



LEMO JAZZ

1108

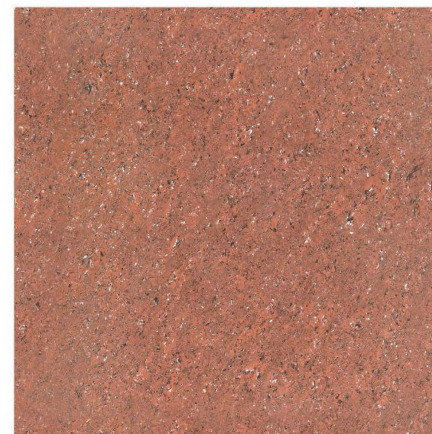

LEMO CHERRY

1109


Holy

Dedicated to luxurious life

REX SERIES




600x600
millimeters

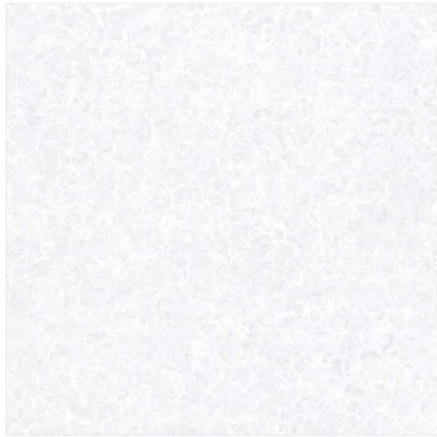

REX WHITE

2001

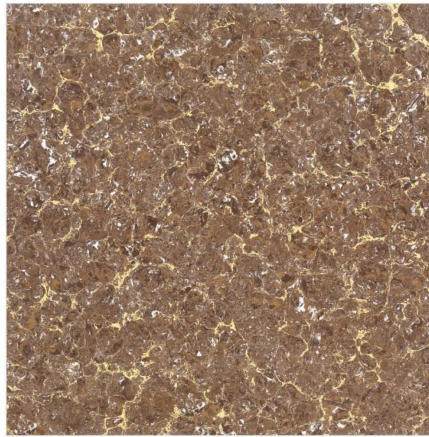


REX BROWN

2101



REX WONDER

2002

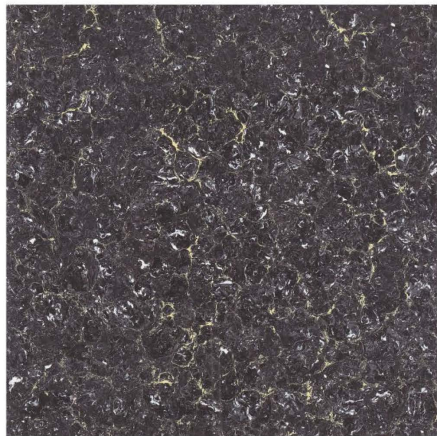

REX BLACK

2103



REX GOLD

2003



Technical Specification

Sr. No.	Particulars	Standard as per ISO 13003/EN176 Group Bla	Holy Value	Method of Testing
01	Deviation in length	± 0.60 %	± 0.10 %	ISO 10545 - 2
02	Deviation in Thickness	± 5 %	± 2 %	ISO 10545 - 2
03	Straightness Of Side	± 0.50 %	± 0.10 %	ISO 10545 - 2
04	Rectangularity	± 0.60 %	± 0.20 %	ISO 10545 - 2
05	Surface Flatness	± 0.50 %	± 0.20 %	ISO 10545 - 2
06	Water Absorption	< 0.05 %	< 0.05 %	ISO 10545 - 2
07	Mohs Hardness	< 6	< 6	EN 101
08	Flexural Strength	> 35 N/mm ² %	> 45 N/mm ² %	ISO 10545 - 4
09	Abrasion Resistance	> 175mm ² %	> 144mm ²	ISO 10545 - 6
10	Skid Resistance	> 0.4 %	> 0.4	ISO 10545 -17
11	Breaking Strength	1113 N %	> 2500 n	ISO 10545 -4
12	Density (g/cc)	> 2	2.4	ISO 10545 -3
13	Frost Resistance	Frost Proof	Frost Proof	ISO 10545 -12
14	Chemical Resistance	No damage	No damage	ISO 10545 -13
15	Thermal Shock Resistance	No damage	No damage	ISO 10545 -9
16	Coulor Resistance	No damage	No damage	DIN 51094
17	Thermal Expansion	> 9 x 10 ⁻⁶	> 6 x 10 ⁻⁶	ISO 10545 -8
19	Moisture	Nil	Nil	DIN 51094
20	Glossiness	> 65 % Reflecaion	Glossmater

Packing Details

Sr. No.	Size	No. of Tiles / Boxes	Coverage Area		Approx Weight / Box
1	600x600mm	4	1.44 Sq.Mtr.	15.50 Sq.Ft.	28.00 Kgs.
2	800x800mm	3	1.92 Sq.Mtr.	20.666 Sq.Ft.	40.00 Kgs.

Note :

The reproduction of tiles in this catalogue is restricted to four colour printing only and tiles are not relative in sizes. Conforming to ISO requirements, technical specifications of Lemorex are applicable only for first grade / first quality vitrified Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid / fixed. Price category may change without any notice. Customers are advised to confirm it before placing order.

EXCLUSIVE APPLICATIONS



Holy