
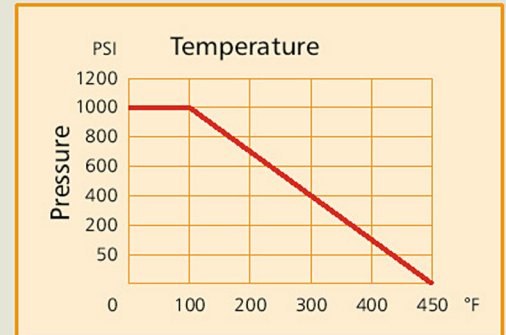
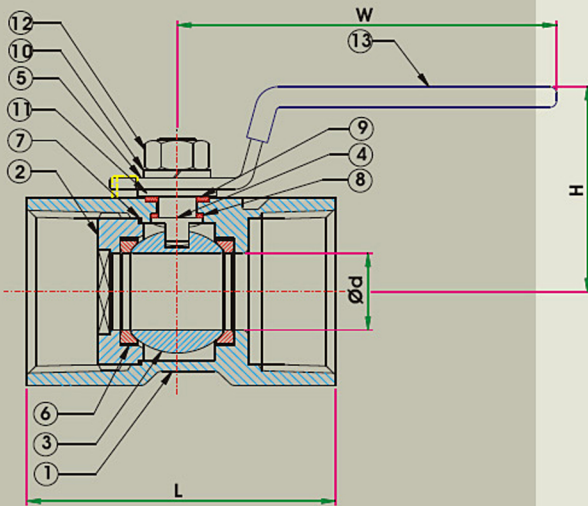


I PC BALL VALVE 1000 WOG

Screwed Ends Reduced Bore

Features

- Unibody design
- Investment cast body
- PTFE seat standard
- R-PTFE (optional)
- Blow out proof stem
- Threading : NPT, DIN, BS, JIS

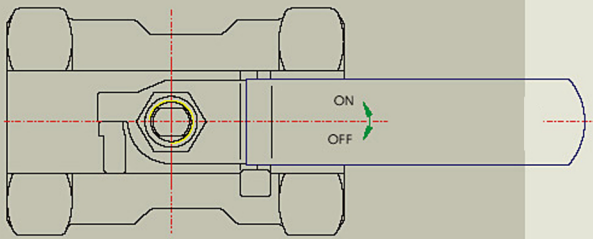

Item	Parts	Material
1	Body	ASTM-A351-CF8M
2	Retainer	ASTM-A351-CF8M
3	Ball	ASTM-A351-CF8M
4	Stem	AISI 316
5	Handle	AISI 304/Carbon Steel
6	Ball Seat	PTFE
7	Body Seal	PTFE
8	Thrust Washer	PTFE
9	Stem Packing	PTFE
10	Spring Washer	AISI 304/Alloy Steel
11	Washer	AISI 304
12	Hex Nut	AISI 304
13	Handle Sleeve	PVC

Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Ød	5	7	9.2	12.5	15	20	25	32
L	39	44	57	59	71	78	83	100
H	35	36	44	47	50	56	67	73
W	61	72	90	88	105	105	129	129
Cv	2.5	4.5	7	9	16	24	37	68
TQ	3.5	7	12	19	30	44	57	91
KG	0.069	0.104	0.182	0.269	0.423	0.698	0.847	1.354

TQ = Torque. Unit: in-lb

Unit: mm

KG = Weight. Unit: kg

Cv = Gallons per minute of water thru' valve with 1 PSI pressure drop