

LMM 40 / LMM 100 / LMM 100T

Internal Gauge Calibration

Length Measuring System



LMM 40



LMM 100 / LMM 100T

LMM 40

Universal Length Measuring Machine



Features :

- A model of Universal length measuring machine specially designed for high precision parts of Horology, Aerospace & Micro Precision Industries.
- Compliance with Abbe's comparator principle
- Constant Precision measuring force over entire measuring range
- Adjustable work table in 5 axis for easy location of inversion point.
- Highly stable World class electronic incremental encoder system.
- Designed for laboratory as well as shop floor measurements.

Technical Specifications:	
Measuring Range	
Absolute	40 mm
Differential	80 mm
Application Range	
External Plain	0-80 mm
Internal Plain	1-60 mm
Cylindrical Thread External (d2) (Pitch: 0.2 - 6mm)	1-60 mm
Cylindrical Thread Internal (D2) (Pitch: 0.5 - 6mm)	3-40 mm
Performance data	
X axis resolution	0.1 μ m
Measurement uncertainty	0.5 + L / 1000 μ m
Measuring force	0.2 N, 0.5 N, 1 N
Work Table / Vertical Axis	
Work table dimension	75 x 75 mm
Height adjustment	30 mm
Float	14 mm
Rotation	\pm 1.5°
Tilt	\pm 1.5°
Load Capacity	1 kg
Dimensions, weight and operational conditions	
L x W x H	560 x 220 x 360 mm
Weight (kg)	40 kg
Power supply	230 VAC, 50 Hz
Display System	DRO

Note:

- Special accuracies, measuring ranges are available upon request.

LMM 100 / LMM 100T

Universal Length Measuring Machine



Features :

- Special purpose measuring machine designed for single arm internal measurements .
- Compliance with Abbe's comparator principle
- Machine designed for fast and easy to use.
- Precision work table guided in Z direction with self weight balancing and fine movement adjustment.
- Constant measuring force over entire measuring range
- Highly stable World class electronic incremental encoder system for precision measurements.
- High precision thread measuring Ruby Styli provided as accessories for precision thread measurements.
- Most affordable price .
- Taper measuring facility available with machine model LMM 100T which facilitates taper thread measurements also .

Technical Specifications:	
Measuring Range	
Absolute	100 mm
Application Range	
Internal Plain	3 - 100 mm
Cylindrical Thread Internal (D2) (Pitch: 0.5 - 6mm)	3 - 100 mm
External Taper*	up to 80 mm
Internal Taper*	3 - 100 mm
Taper Thread External (d2)*	up to 80 mm
Taper Thread Internal (D2)*	3 - 100 mm
Performance data	
X axis resolution	0.1 μ m
Measurement uncertainty	0.5 + L / 1000 μ m
Measuring force	0.2 N
Work Table / Vertical Axis	
Work table dimension	150 x 150 mm
Height adjustment	60 mm
Resolution	0.1 μ m
Load Capacity	5 kg
Dimensions, weight and operational conditions	
L x W x H	600 x 250 x 470 mm
Weight (kg)	60 kg
Power supply	230 VAC, 50 Hz
Display System	DRO

* Available with Model LMM 100T

Octagon ULM Inspect Gauge Measurement and Management Software



Octagon ULM Inspect.

Features :

- Online Data acquisition from ULM
- Facility for thermal error corrections (Manual / Online)
- Automatic Reversal Point detection for dynamic data
- Operator guided measurement program for plain gauges, thread gauges, spline gauges and inspection / calibration measuring instruments like dial indicators, bore gauges and micrometers.
- Calibration report generation in the format complying to ISO/IEC 17025.
- Gauge record management including calibration date, user details, gauge type, due dates etc.



Basic Module:

- Operator guided measurement program for plain and thread gauges.
- Automatic Tolerance calculations for Plain gauges as per IS 3455 & ISO 919 metric thread gauges as per IS 4218, IS 2334 & ISO 965.
- Thread formulae evaluation for over wire / ball measurements.
- Facility for thermal error corrections (Manual / on-line), correction of systematic machine errors.
- Maintenance of Gauge records

Add-on Module 1

- Thread Gauge inspection program.
- This add-on module facilitates automatic tolerance calculations and measurement program for various types of thread gauges including ISO metric M, ISO metric MJ, Unified UN -UNR -UNJ, Withworth, ISO pipe G threads, ISO Trapezoidal, ACME Trapezoidal, Stub trapezoidal, Miniature, Buttress, Knuckle screw threads as per various National & International standards.

Add-on Module 2

- Inspection program for Gauge block / length Bar. This add-on module facilitates automatic tolerance calculations and measurement program for gauge blocks as per ISO 3650, IS 2984 and length Bars as per IS 7014.

Add-on Module 3

- Inspection program for Internal / external micrometers. This add-on module facilitates automatic tolerance calculations and measurement program for Internal micrometer as per IS 2966 and external micrometers as per IS 2967 standards.

Add on Module 4


- Inspection program for Dial indicators & Cy. Bore Gauges. This add-on module facilitates automatic tolerance calculations and measurement program for Dial Indicators as per IS 2092, Dial test indicators as per IS 11498 and Cy. Bore Gauges as per JIS 7515 Standard.

Add on Module 5

- Inspection program for Spline Gauges This add-on module facilitates automatic tolerance calculations and measurement program for spline gauges as per ISO 4156.

Add on Module 6

- Inspection program for Taper Gauges. This add-on module facilitates automatic tolerance calculations and measurement program for Taper gauges as per IS 9475, IS 2251 and Taper thread gauges as per BS 21, ANSI/ASNE B1.20.1(NPT)

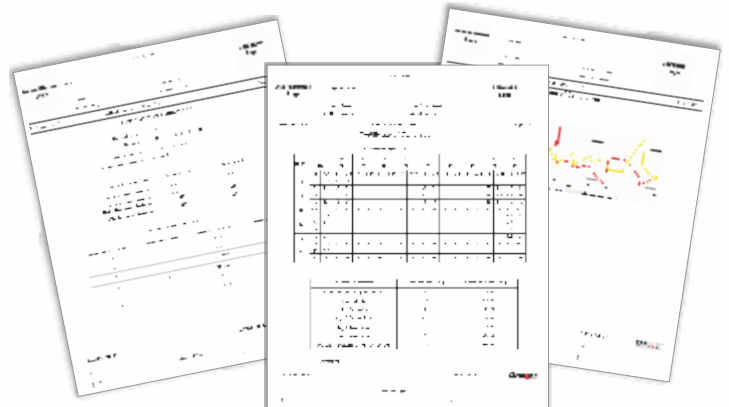



QMSOFT® Gauge Management Software

Octagon Length Measurement machines can also be offered with QMSOFT® Software package from L&W GmbH as an alternative option.


Features :

- All nominal sizes and tolerances for all related DIN or ISO standards as well as for ANSI standards, British standards and partly for Japanese, French or Korean standards are calculated by the program system.
- Gauge inspections will be started directly from the gauge management system and will be performed with inspection programs specially designed for the gauge type selected.
- Predefined inspection procedures does the following exactly the given rules and standards. So you do not need any preparation before starting a measurement.

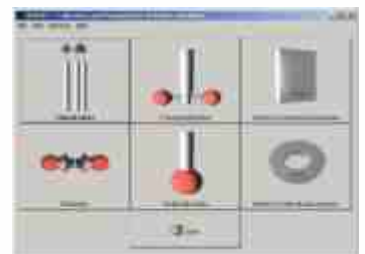

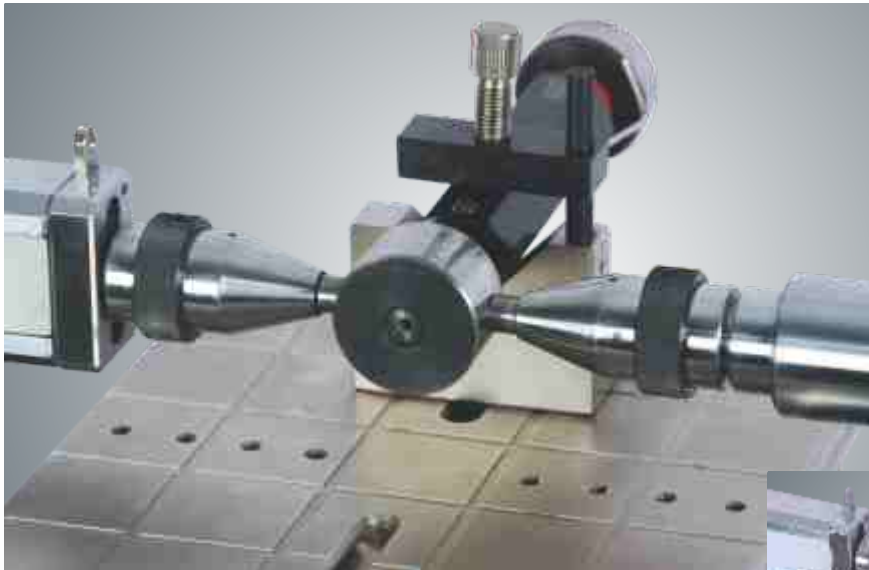

Plug Gauge (below 40 mm) measurement : Hold in Vee block holder

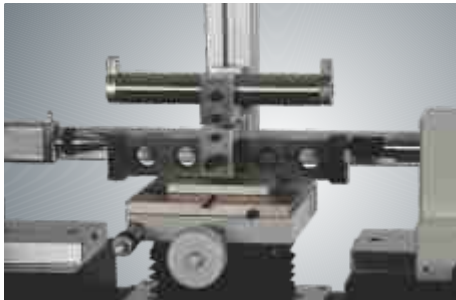


Plug Gauge (plate type) measurement : Hold on universal holder




Plug Gauge (above 40 mm) measurement : Hold on parallel blocks


External Measurements
Plain Plug Gauge / Cy. Standard Measurement :
By using a pair of Flat Anvils 8 mm dia.



Measurement of cylinder diameter across flat anvils

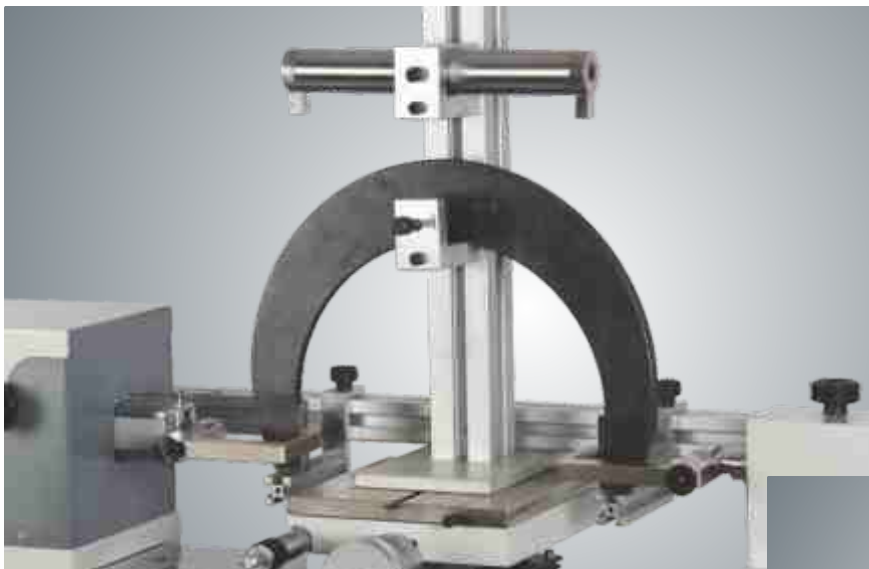


Snap Gauge C Type (above 300 mm) measurement : Hold on universal holder

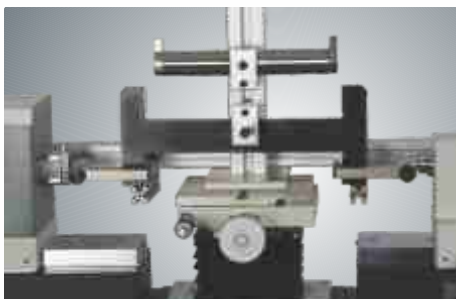

Snap Gauge (I type) measurement : Hold on universal holder

Internal Measurements
Snap Gauge Measurement :
By using fixed dual arms



Measurement of gap by using spherical contact fixed dual arms



Snap Gauge (below 300 mm) measurement : Hold on snap gauge holding attachment

Internal Measurements

Ring Gauge Measurement :


By using Single Arm measuring attachment and / Or by using a pair of fixed dual arms.




Plain ring diameter (above 10 mm) measurement : Using a pair of fixed arms



Plain ring diameter (above 2 mm) measurement : Using a Single Ruby Ball Stylus with bi-directional probing system of single arm measuring attachment



Measurement of internal diameter by using single arm measuring attachment with one axis bi-directional probing




Measurement of internal diameter by using spherical contact fixed dual arms

External & Internal Taper Measurements :

Taper Plug Gauge / Taper Ring Gauge


By using Single Arm measuring attachment and / Or by a pair of Flat Anvils 8 mm dia.



Measurement of Taper angle and diameter by Precision cylindrical pin gauges.




Taper plug gauge measurement : By using cylindrical pin gauges (over pin measurement)



Measurement of Taper angle and diameter by using single arm measuring attachment with two axis bi-directional probing



Taper ring gauge measurement : Using a Single Ruby Ball Stylus with bi-directional probing system of single arm measuring attachment



Measurement of Taper angle & diameter by using single arm measuring attachment with two axis bi-directional probing



Taper Plug gauge measurement : Using a Single Ruby Ball Stylus with bi-directional probing system of single arm measuring attachment



Cy. Thread Plug Gauge (below 100 mm) measurement : Hold between center table

Cylindrical Thread Measurement (External)

Thread Plug Gauge Measurement :


By using three wire method : a pair of Flat Anvils 8 mm dia. & Thread measuring wires



Three Wire Method For Measurement Of Effective Diameter (d2) Of External Thread



Cy. Thread Plug Gauge Measurement of Effective diameter Below 40 mm : Hold in Vee block holder

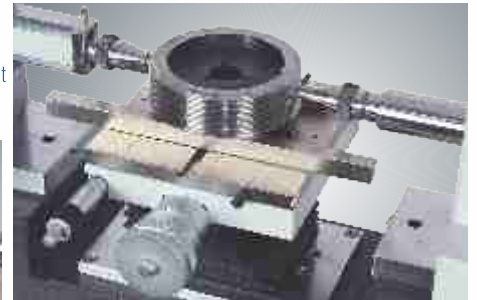


Above 40 mm : Hold on parallel blocks


Cylindrical Thread Measurement (Internal)

Thread Ring Gauge Measurement :

Single Arm Measurement /Dual Arms Measurement



Thread ring gauge measurement of Effective Diameter (D2) by using flexible dual arm & spherical ruby styli



Thread ring gauge measurement of Effective Diameter (D2) by using single arm measurement attachment with single axis bi-directional probe & T-shape stylus

Cy. Measurement of effective diameter by using single arm measuring attachment & Precision Ruby T-Shape styli



Cy. Thread Ring gauge measurement of effective diameter by Precision Ruby ball styli and flexible dual measuring arms



Measurement of effective diameter by thread measuring wires

Taper Thread Plug Gauge Measurement :

By using thread measuring wires and a pair of flat Anvils (8 mm) and / or by using Single Arm Measuring attachment with μ_{2d} probe (Two axis bi-directional probing) and T-shape Ruby stylus.



Taper Thread plug gauge measurement of d2 by using thread measuring wires and a pair of flat anvils




Taper thread plug gauge measurement of d2 by using single arm measurement attachment



Measurement of effective diameter by T Shape Ruby Stylus Two axis bi-directional probing

Taper Thread Ring Gauge Measurement :

By using Single Arm Measuring attachment with μ_{2d} probe (Two axis bi-directional probing) and T-shape Ruby stylus.





Taper thread ring gauge measurement of D2 by using single arm measurement attachment



Measurement of effective diameter by T Shape Ruby Stylus Two axis bi-directional probing

Gear Measurement :
Spline Plug Gauge, Spline Ring Gauge measurement

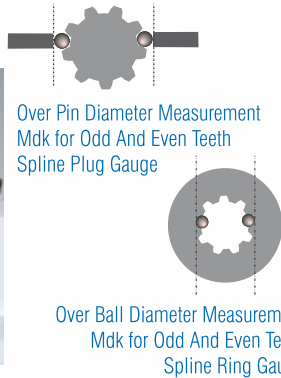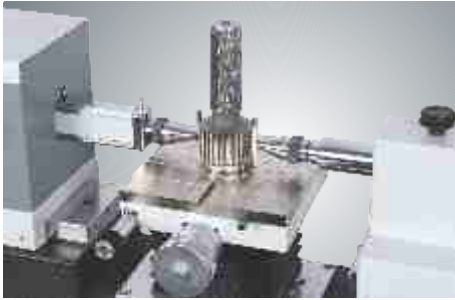

Spline plug gauge measurement by using cylindrical pins and a pair of flat anvils





Spline ring gauge measurement by using fixed dual arm and precision spherical styli : Hold on floating table.



Gauge block measurement : Hold on table by using holding attachment

Calibration / Inspection of measuring instruments :
Gauge Block, length Bar, setting standards measurements :
By using a pair of spherical Anvils

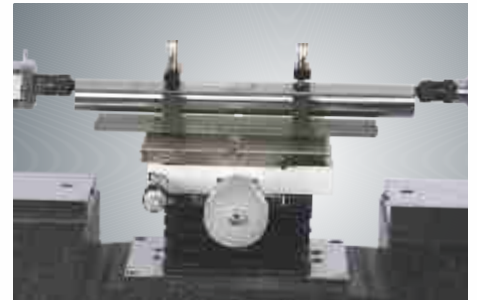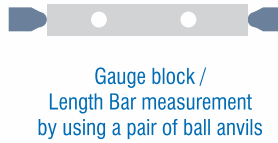

Length bar measurement : Hold on table by using holding attachment

Calibration / Inspection of measuring instruments :
Dial Indicators, Dial Test Indicators, Bore Gauge




Dial Indicator Calibration : Hold on table by using holding attachment



Bore Gauge Calibration : Hold on table by using holding attachment and machine spindle drive unit.




Dial Test Indicator Calibration : Hold on table by using holding attachment

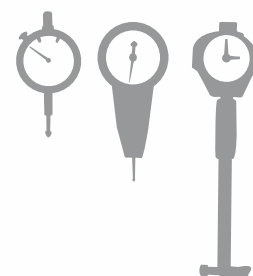

Universal Length Measuring System For Calibration Metrology


Calibration / Inspection of measuring instruments :
External Micrometers / Internal Micrometers, Calipers.

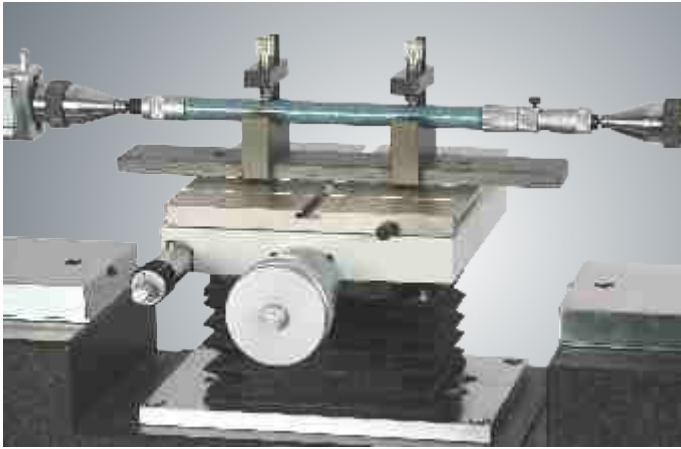

Internal Micrometer (2 point) Calibration : Hold on table by using holding attachment




Internal micrometer (3 point) Calibration : By using V reference standards and Flat anvil.

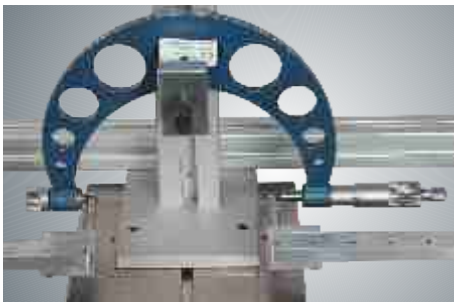

External Micrometer (above 150 mm) Calibration :
Hold on universal holder.



External Micrometer (Below 150 mm) Calibration :
Hold on table by using C clamp

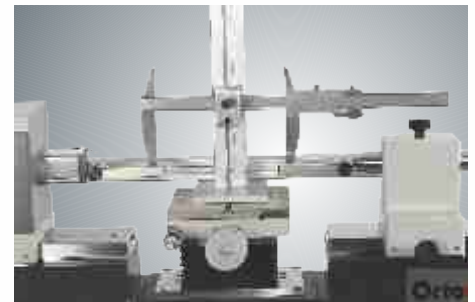

Caliper Calibration : Hold on universal holder



Octagon[®]
PRECISION

Octagon Precision (India) Pvt. Ltd.

Regd. Off. : 3 / 19 Girija Society, M.I.T. College Road, Kothrud, Pune 411029. India
Plant : S.No. 15 A/2, J7 & J8, GKD Industrial Estate, Nandedgaon, Sinhgad Road, Pune 411041.
Tel. : + 91 - 20 - 3231 8697
Fax : + 91 - 20 - 2543 9282
E-mail : sales@octagon.co.in
Web : www.octagon.co.in